




PRODUCT DATASHEET

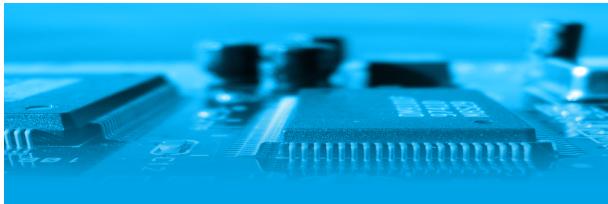

Highlights

JUXTAPOSABLE CASES

The side covers are removable to facilitate cable connections from one case to another when juxtaposed. Attention: in this use, the weight of the supported batteries is limited to 1 battery 7 Ah.

SIMPLICITY

The optional 4 LED indication on the front panel allows the display of the power supply informations.

SECURITY

The openings are equipped with a tamper protection contact, which triggers the alarm system if the case is opened.

Tamper protection against pull-out is also available as an option.

Main features

- 2.5 cm wall distance
- Removable side covers
- Large depth to accept a 24 Ah battery
- The front cover is attached by means of quarter-turn screws (interdependent with the case) and tamper protection contact
- Central and side cable conduits are wide (4 cm) on the COF08-B
- Optional 4 LED display

COF04-B ET COF08-B



Usability et Sleek design

The new COF04-B and COF08-B cases are designed to receive UTIL or TILLYS control units, their power supplies and all the specialised remote modules of TIL Technologies.

Designed for easy mounting and cabling, the cases include a wall offset and numerous rear holes for cable entry.

Both cases are equipped with a modern front cover protected by a tamper protection.

A 4 LED indication on the front cover is also available as an option, to display the power supply informations.

Depending on the model, the cases are provided with one or two DIN rails for fixing the modules.


Their depth allows to integrate a battery up to 24 Ah.

TIL TECHNOLOGIES CASES

COF04-B	COF08-B	COF22

COF04-B AND COF08-B

Dimensions

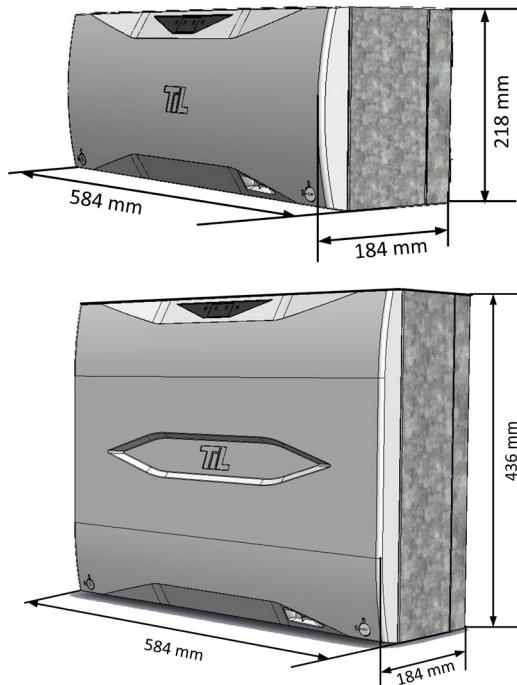

Fixations et positions

- Drill holes are available behind the cable conduits
- Width of top of the cable conduit : 2 cm
- Width of central and side cable conduits : 4 cm



Technical details

Common features

- **Materials** : steel case, plastic front cover
- **Colours** : dark grey case (RAL7016), light grey front cover (RAL 7045)
- **Supported weight** : limited to 2 batteries 17 Ah or 1 battery 24 Ah per case.
If a side cover is removed: weight limited to 1 battery 7 Ah, otherwise you will have to provide 2 support brackets.

COF04-B :

- **Dimensions** : 584 x 184 x 218 mm
- **Net weight** : 4,2 Kg
- **Packed weight** : 4,5 Kg

COF08-B :

- **Dimensions** : 584 x 184 x 436 mm
- **Top cable conduit** : width 2 cm
- **Central and side cable conduits** : width 4 cm
- **Net weight** : 7,2 Kg
- **Packed weight** : 7,6 Kg

Product references

Cases

- COF04-B : steel case, plastic front cover, provided with 1 DIN rail, tamper protection for opening, 218 x 584 x 184 mm.
- COF08-B : steel case, plastic front cover, provided with 2 DIN rail, tamper protection for opening, 436 x 584 x 184 mm.

Options

- COF04-B-AFF : optional front cover LED signalling for COF04-B with power supplies AL1260SB and AL2430SB.
- COF04-B-AFF1 : optional front cover LED signalling for COF04-B with power supplies AL1240SB
- COF08-B-AFF : optional front cover LED signalling for COF08-B with power supplies AL1260SB and AL2430SB.
- COF08-B-AFF1 : optional front cover LED signalling for COF08-B with power supplies AL1240SB
- COF04-B-ARR : Optional tamper protection against pull-out, for COF04-B et COF08-B.

Sales contact: info@hirschsecure.fr
www.til-technologies.com